

GENASUN™



10-30% More Power from your Panels with Genasun's GV-10 MPPT Solar Charge Controller

Genasun's GV-10 solar charge controller employs Maximum Power Point Tracking (MPPT) to deliver 10 - 30% more power from your solar panels than conventional PWM controllers. Connected between a solar panel and a 12V battery, Genasun's controller operates the solar panel at its most efficient voltage, typically higher than the battery voltage. Through high-efficiency power conversion, this extra voltage is turned into extra current, right to your batteries.

The GV-10's tiny night consumption and wide battery temperature compensation range make it an ideal choice for remote outdoor installations. The GV-10 may also be ordered for many common types of lithium batteries.

Specifications:

Rated Panel Power140 W
Rated Output Current 10.5 A
Input Voltage 0 - 34 V
Night Consumption.....800 μ A (0.8 mA)
Absorption Voltage 14.2 V
Battery Float Voltage 13.8 V
Temperature Compensation-28mV/°C
(Lithium Battery Versions Available)
Electrical Efficiency (typical) 95%
MPPT Tracking Efficiency (typical) 99%
Size5.5x2.5x1.5", 14x6.5x3.5cm
Weight 6.5oz., 185g




Features:

- 10 - 30% Typical Power Gain
- Prevents Over-Charging
- Marine-Grade Hardware
- LED Status Indicator
- Overload Protected
- Over-Temperature Protected
- Automatic Fault Recovery
- Robust Tracking Algorithm
- Can Charge from DC Source
- Made in USA
- Limited Lifetime Warranty

Applications:

- Remote Monitoring
- Rural Electrification
- Roadway Signage
- Parking Pay Stations
- Sailboats
- Campers

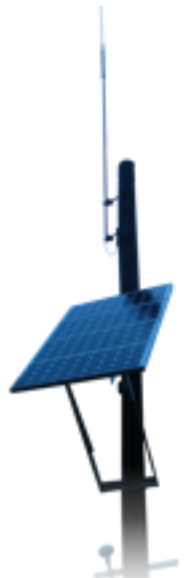

GENASUN

1035 Cambridge St., Suite 16B • Cambridge, MA 02141 • USA
www.genasun.com • info@genasun.com • +1 617 369 9083